

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/339442997>

Adsorptive Removal of Sodium Lauryl Sulfate, Cetyl Trimethyl Ammonium Bromide & Triton X-100 using Non-Conventional Adsorbent through Chemical Kinetics & Thermodynamics: A Comparat...

Article · December 2018

CITATION

1

READS

53

2 authors:



Manisha Agrawal

Rungta College of Engineering and Technology

23 PUBLICATIONS 21 CITATIONS

SEE PROFILE



Jyoti Kapil

Rungta College of Engineering and Technology

1 PUBLICATION 1 CITATION

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Development of carbonized agrao granules for the removal of surfactants from waste water / Environmental sample [View project](#)



To design and develop a compact mechanism for onsite recycling of domestic waste water and recharging of underground water tubule [View project](#)

Adsorptive Removal of Sodium Lauryl Sulfate, Cetyl Trimethyl Ammonium Bromide & Triton X-100 using Non-Conventional Adsorbent through Chemical Kinetics & Thermodynamics: A Comparative Study

¹Jyoti Kapil Nagwanshi, ²Manisha A. Agrawal

¹Ph.D Research Scholar, ²Professor and Head

^{1,2}Department of Applied Chemistry,

¹Rungta College of Engineering & Technology, Kohka, Bhilai, India

Abstract : The object of present study is to examine the potential use of carbonized orange peel (COP) as an economical and non-conventional adsorbent for adsorptive removal of anionic, cationic and non-ionic surfactants from municipal effluent. Comparison has done among fresh COP, alkali and acid activated recycled COP. In addition, investigation of the chemical kinetics and thermodynamics has also been conducted. Pseudo second order rate equation is used to determine the equilibrium amount adsorbed and equilibrium concentration for different initial concentrations. Result shows that the chemical kinetics of adsorption of sodium lauryl sulfate (SLS), cetyltrimethyl ammonium bromide (CTAB) and Triton X-100 (TX-100) have the values of rate constant (K): 4.035×10^{-3} , 5.0×10^{-3} and $4.52 \times 10^{-3} \text{ g.mg}^{-1}\text{min.}$ respectively. The negative numerical values of Standard Gibb's Free Energy Change (ΔG^0) of SLS, CTAB and TX-100 are -2.969, -2.776 and -2.863 kJmol^{-1} respectively, which show that the adsorption of all the three surfactants on fresh and treated carbonized orange peel (COP) is found to be spontaneous, feasible and exothermic in nature.

Index Terms-- Non-conventional adsorbent, Adsorptive removal, Surfactants, Chemical kinetics, Thermodynamic, SLS, CTAB, TX-100, Standard Gibb's Free Energy Change.

I. INTRODUCTION

Surfactants are the organic compounds that are best known for their wide use in many domestic and industrial applications. They are used as ingredients not only in detergents, soaps, cosmetics and personal care products, but also in paints, pesticides, textile, food, plastic, fibre, paper and leather industries and many more [1]. Surfactants are daily discharged to the environment from urban, rural and industrial activities. They are among widespread xenobiotics that may enter waste streams and the aquatic environment. Recent studies have demonstrated the persistence and accumulation of surfactants and their biodegradation products in the environment [2]. Surfactant adsorption is essential to be undertaken since effluent generated by surfactants as a result of their use shows an increase in proportion to the increase in the human's population. The pollution caused by surfactants in the environment such as foam emergence and their limited biodegradation by micro-organisms results in the disturbance of water ecosystem [3]. Surfactants thus decrease water quality by lowering surface tension of water as well as decreasing biological oxygen demand (BOD) and by increasing chemical oxygen demand (COD). They are very harmful for aquatic flora and fauna and adversely affect all the living organisms through food chain ultimately. They affect aquatic flora by hindering their photosynthesis. Surfactants may cause chronic and acute effects on sensitive organisms. Moreover they affect the growth, motility and photosynthetic ability of algae [4]. Its long term exposure can cause cancer. In other words, surfactants are responsible for short term as well as long term effects on human beings, aquatic organisms, vegetation and environment. Therefore surfactant removal is necessary from aquatic environment for the elimination of surfactant contamination.

A variety of chemical, physical and biological techniques have been widely used to treat surfactant bearing wastewater, including adsorption [5], [6], [7], nano-filtration [8], [9], ion-exchange [8], biosorption, liquid-liquid extraction, advanced oxidation [10], [11], ozonation, coagulation/flocculation [12], ultraviolet photolysis [12], [11] etc. The advantages and disadvantages of every removal technique have been extensively reviewed. However, most of these methods have major drawbacks, such as- they require expensive and sophisticated equipments, pricey chemicals, high costs, trained technical staff and are more suitable for application in reference labs. Thus the removal of surfactants in an effective and economic way remains an important issue for researchers and environmentalists.

Overall adsorption has proven to be one of the most useful and effective among the control techniques. It is a separation technique in terms of initial cost, simplicity of design, ease of operation and execution, insensitive to toxic substances, easily adaptable, lower land area requirement, potential for significant removal of both organic and inorganic pollutants even at very low concentration, no sludge formation & adsorbent can be regenerated and reused again.

The disposal of agro-waste materials is increasingly becoming a cause for concern because these wastes represent unused resources. A major part of these wastes is normally used as domestic fuel. However, for better utilization of these cheap and abundantly available agricultural waste products, it can be explored as a low-cost alternative adsorbent owing to relatively high fixed

carbon content and presence of porous structure. Thus interest has grown towards the use of orange peel, an agro-waste material, as non-conventional adsorbent for the adsorptive removal of surfactants due to its ease of availability, renewability and biodegradability, cost-effectiveness, non-toxicity. Orange peel as agricultural spent material is sustainable for the environment. The conversion of this agro-waste material into a useful commodity towards the removal of a potential contaminant seems to be an attractive way in economic as well as environmental point of view. The thermodynamics of the binding process is also investigated, which includes determining the thermodynamic equilibrium adsorption constant, its natural log and Standard Gibb's Free Energy Change. The kinetics of adsorption process is also studied.

II. MATERIALS AND METHOD

A. Adsorbate

Merck made (analytical reagent grade) SLS, CTAB and TX-100 are used as adsorbates.

B. Preparation of Adsorbent Bed

Orange peel used as the precursor is collected from local fruit market, Bhilai, CG, India. The procedure employed in producing carbonized peel is drawn below-

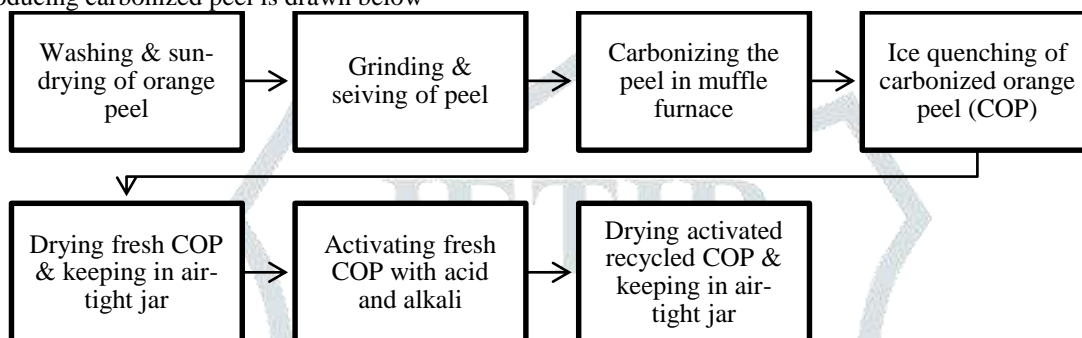


Fig.1: Flow diagram of preparation of adsorbent bed

Morphological image of COP is shown in figure 2, which shows that although the particles are of different sizes, but adsorb surfactant solutions efficiently.

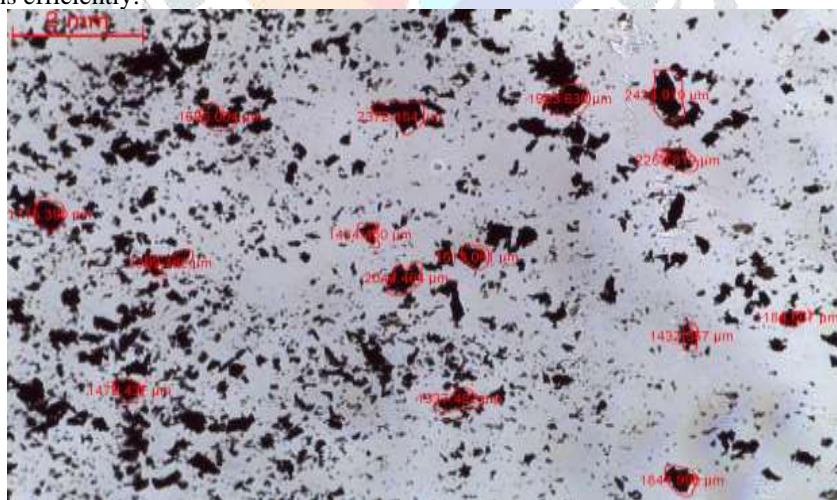


Fig. 2: Morphological image of carbonized orange peel (COP) with particle size

C. Chemicals Used

Orange-G, sodium chloride, chloroform, crystal violet, ortho-phosphoric acid, benzene, eosin-Y, borate buffer etc. chemicals are received from Merck (AR grade) and used without purification.

D. Instruments Used

The PC based Double Beam UV-Visible Spectrophotometer (Systronics, Model-2202), Digital Water and Soil Analysis Kit (Model no. 161) and Traube's Stalagmometer are used for measuring OD, pH, conductivity and surface tension respectively. Carbonized peel is prepared in muffle furnace (Tempstar ISO 9001:2000 Company). Research microscope (Leica DM750) is used to study the morphology of COP.

E. Experimental Protocol

The batch adsorption experiments are conducted in a set of 250 ml of shaking bottle containing adsorbent bed and 100-100 ml of SLS, CTAB and TX-100 solutions with different initial concentrations. Comparative study of adsorption of all the three surfactant solutions on COP has done for checking the capacity of fresh COP, acid and alkali activated recycled COP.

F. Optimization of Experimental Conditions

Optimization is done to check the efficacy of adsorbent bed, by changing three experimental conditions: (1) initial concentration of surfactant solutions; (2) doses of adsorbent bed; (3) shaking time. Adsorption of SLS, CTAB and TX-100 is studied by UV-Visible spectrophotometric, pH, electrical conductivity and stalagmometric methods. Experiments are independently performed and repeated again and again to get the accurate values.

G. Kinetic Study:

The study of kinetics of adsorption process is done by determining the average adsorption rate (Ms^{-1}) for each initial concentration of surfactant solutions [13]. It is necessary to know the rate of adsorption as adsorption is a time dependent procedure [14]. Adsorption rate can be calculated by using equation (1)-

$$\text{Rate of adsorption} = K \times C_i \tag{1}$$

Where, K = Rate constant

C_i = Initial concentration

The values of K for SLS, CTAB and TX-100 are 4.035×10^{-3} , 5.0×10^{-3} and $4.52 \times 10^{-3} \text{ g.mg}^{-1}\text{min.}$ respectively.

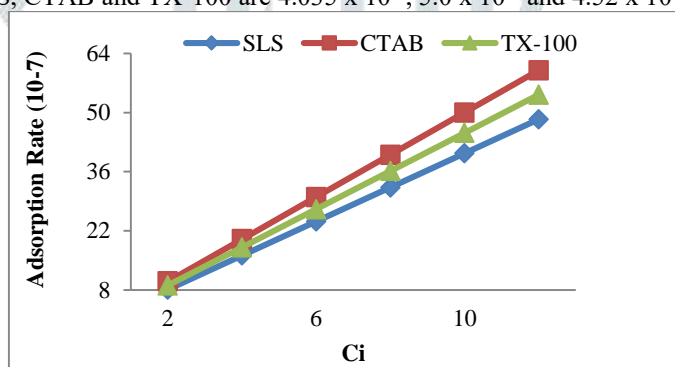


Fig.3: A plot of C_i Vs Adsorption Rate

H. Thermodynamic Study:

The adsorption characteristics of surfactants can be expressed in terms of thermodynamic parameters such as thermodynamic equilibrium adsorption constant (K_c), its natural log ($\ln K_c$) and Standard Gibb's Free Energy Change (ΔG^0) [15], [16], [17], [18]. The value of thermodynamic equilibrium constant (K_c) at 303 K temperature is calculated in accordance with the following equation (2)-

$$K_c = \frac{C_{ad}}{C_e} \tag{2}$$

where, K_c be the equilibrium adsorption constant, C_{ad} be the equilibrium concentration of surfactant on adsorbent bed surface and C_e be the equilibrium concentration of surfactant in solution. Calculation of Standard Gibb's Free Energy Change (ΔG^0) is done by using equation (3)-

$$\Delta G^0 = -RT \ln K_c \tag{3}$$

where, ΔG^0 be the Standard Gibb's Free Energy Change, R be the Universal gas constant ($8.314 \text{ joule}^0/\text{mole}$), T be the absolute temperature and $\ln K_c$ be the natural log of equilibrium adsorption constant.

Table 1: Thermodynamic Parameters of Adsorption of SLS, CTAB and TX-100 on COP

S.#	Type of Surfactant	T (Kelvin)	K_c	$\ln K_c$	ΔG^0 (kJmol ⁻¹)
1.	SLS	303	3.25	1.179	-2.969
2.	CTAB	303	3.01	1.102	-2.776
3.	TX-100	303	3.12	1.138	-2.863

Table 1 represents the calculated values of ΔG^0 of SLS, CTAB and TX-100. The negative values of ΔG^0 indicate that the system is spontaneous and exothermic. The shaking process and normal condition of temperature are enough to supply the required energy for the adsorption process.

III. RESULTS AND DISCUSSION

The graphs of pH, electrical conductivity, optical density (OD) and surface tension are plotted against different initial concentrations. Figures are shown below. Fig. 4.1, 4.2 and 4.3 show the comparison among pH values of SLS, CTAB and TX-100 at different initial concentrations using fresh COP, alkali and acid activated recycled COP respectively. Results reveal that at 8×10^{-4}

molar concentration highest adsorption take place. Alkali activated recycled COP is found to be a better adsorbent bed for SLS because the sulphate ions (acid radicals) get adsorb at alkali surface, whereas acid activated recycled COP is better for CTAB adsorption because the ammonium ions (basic radicals) get adsorb at acid surface easily. Adsorption of TX-100 takes place due to weak van der Waals force of attraction. No chemical or ionic bond is formed between adsorbate and adsorbent bed. Similar results are found for electrical conductivity, which are shown in fig 5.1, 5.2 and 5.3.

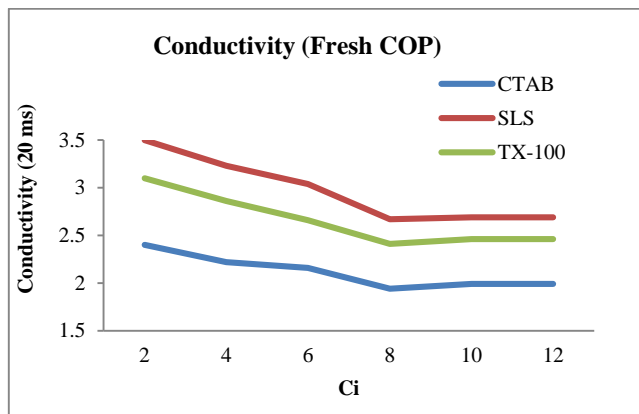


Fig.5.1: A plot of Initial Concentration Vs Conductivity using Fresh COP

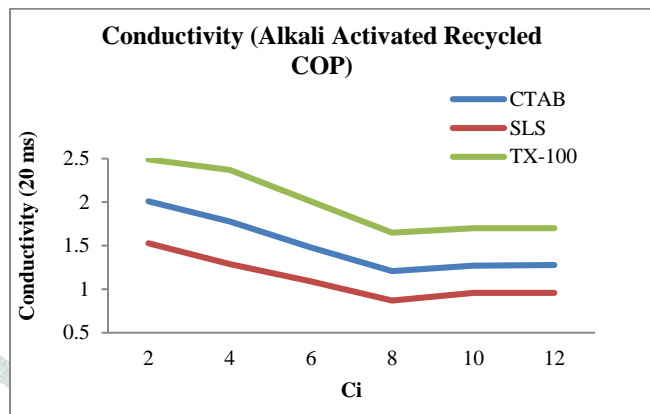


Fig.5.2: A plot of Initial Concentration Vs Conductivity using Alkali Activated Recycled COP

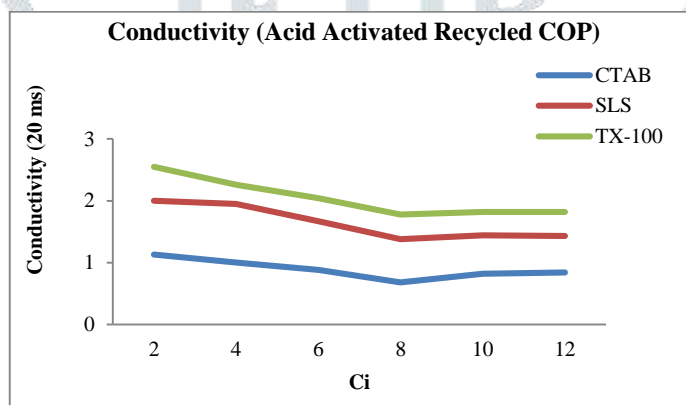


Fig.5.3: A plot of Initial Concentration Vs Conductivity using Acid Activated Recycled COP

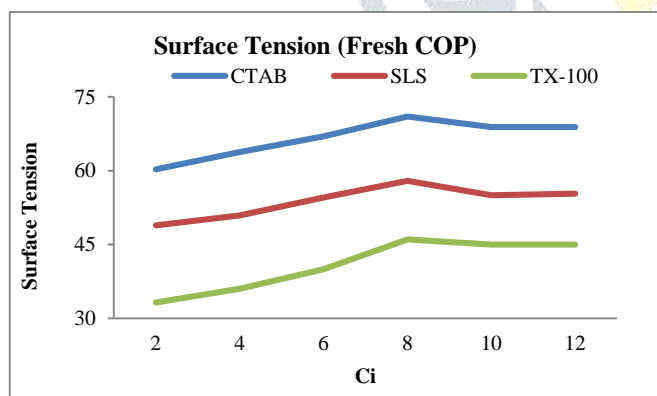


Fig.6.1: A plot of Initial Concentration Vs Surface Tension using Fresh COP

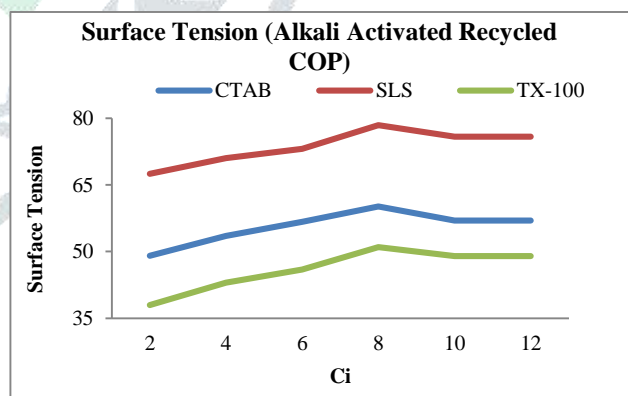


Fig.6.2: A plot of Initial Concentration Vs Surface Tension using Alkali Activated Recycled COP

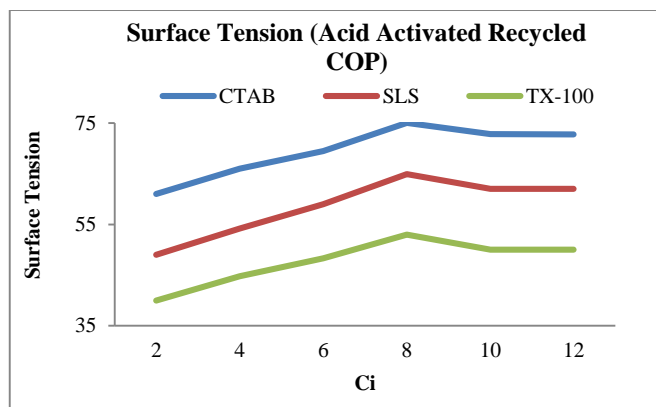


Fig.6.3: A plot of Initial Concentration Vs Surface Tension using Acid Activated Recycled COP

The surface tension values of all the three surfactants for comparative adsorption are shown in fig 6.1, 6.2 and 6.3. Results reveal that SLS is highly adsorbed by alkali activated recycled COP, since alkali can chemically react with sulphate ions (acid radicals) very easily. Greater the value of surface tension, smaller is the concentration of surfactant in the shook solution. Adsorption of CTAB takes place by using acid activated recycled COP, since acid can chemically react with ammonium ions (basic radicals) very easily. TX-100 gets adsorbed through van der waals force of attraction

Fig 7.1, 7.2 and 7.3 are the plots of initial concentration versus OD values of SLS, CTAB and TX-100 solutions, which show the comparative adsorption. Alkali activated recycled COP is found to be a better adsorbent bed for SLS and acid activated recycled COP is found to be a better adsorbent bed for CTAB adsorption.

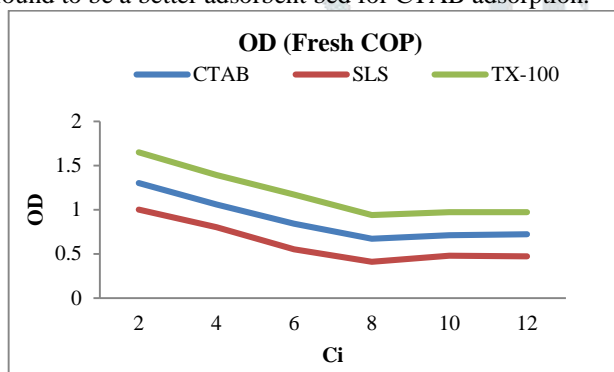


Fig.7.1: A plot of Initial Concentration Vs OD using Fresh COP

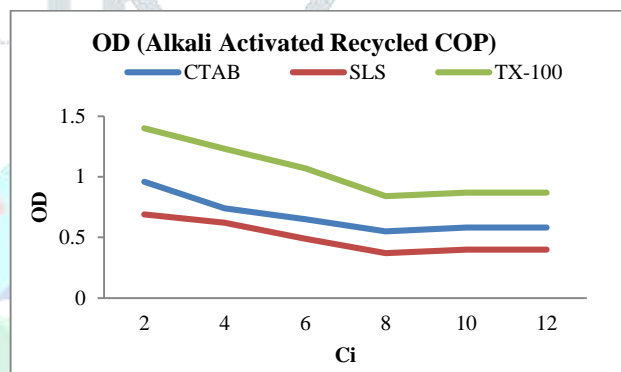


Fig.7.2: A plot of Initial Concentration Vs OD using Alkali Activated Recycled COP

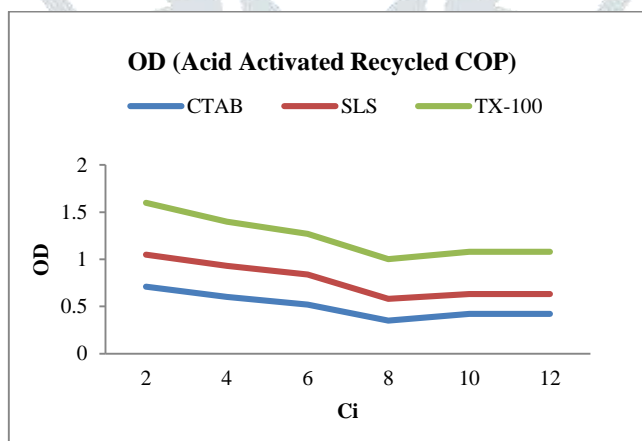


Fig.7.3: A plot of Initial Concentration Vs OD using Acid Activated Recycled COP

The mechanism of comparative adsorption of SLS, CTAB and TX-100 on COP are considered by measuring change in pH, conductivity, surface tension and OD values for different adsorbent bed doses and different shaking time. Related tables are shown below.

Highest adsorption takes place by using 2.0 gm adsorbent bed dose. This is due to the increase in surface area with increase in mass of adsorbent, which results in greater availability of the exchangeable sites or active sorption sites. 45 minute time is found sufficient shaking time to adsorb anionic, cationic and non-ionic surfactants and reaches saturation in about 60 minutes. As the number of adsorption sites was more in the beginning, more and more surfactant molecules get adsorbed, but with the passage of time, the adsorption sites get exhausted and thus lead to slower adsorption and after sometime, equilibrium is attained.

Table 2: Measurement of pH, conductivity, OD and surface tension between adsorption of SLS, CTAB & TX-100 and various adsorbent bed doses

S. #	Surfactant	Charcoal Type	Adsorbent Bed Doses (gm) for pH Measurement				Adsorbent Bed Doses (gm) for Conductivity Measurement				Adsorbent Bed Doses (gm) for OD Measurement				Adsorbent Bed Doses (gm) for Surface Tension Measurement												
			0.4	0.8	1.2	1.6	2.0	2.4	0.4	0.8	1.2	1.6	2.0	2.4	0.4	0.8	1.2	1.6	2.0	2.4	0.4	0.8	1.2	1.6	2.0	2.4	
1	SLS CTAB TX-100	Fresh COP	4.32	4.76	4.98	5.11	5.33	5.29	3.2	2.9	2.73	2.46	2.03	2.12	1.5	1.2	0.83	0.71	0.48	0.62	2.0	48.12	52.45	56.34	61.24	66.0	63.54
			9.02	8.91	8.68	8.44	8.13	8.16	2.4	2.22	2.16	1.98	1.53	1.62	1.7	1.52	1.36	1.01	1.25	60.04	64.21	68.57	72.1	74.78	72.91		
			7.21	7.06	6.72	6.43	6.02	6.07	3.1	2.86	2.66	2.41	2.02	2.17	1.65	1.46	1.22	1.05	0.78	1.01	33.31	37.13	41.0	46.32	50.01	47.35	
2	SLS CTAB TX-100	Alkali Activated Recycled COP	6.3	6.72	7.0	7.59	8.14	8.09	2.31	2.02	1.78	1.59	1.22	1.48	0.99	0.83	0.61	0.46	0.22	0.39	50.06	54.7	60.07	65.5	70.85	67.03	
			8.07	7.65	7.32	6.89	6.44	6.47	1.98	1.58	1.35	1.21	1.01	1.18	1.37	1.05	0.93	0.77	0.55	0.62	63.12	67.0	69.53	72.67	75.0	74.83	
			7.1	6.78	6.55	6.21	6.0	6.11	2.49	2.27	2.03	1.89	1.55	1.64	1.68	1.51	1.35	1.21	1.01	1.16	35.71	39.31	43.0	46.98	51.01	48.53	
3	SLS CTAB TX-100	Acid Activated Recycled COP	5.05	5.77	6.25	6.78	7.0	6.97	2.02	1.95	1.67	1.48	1.16	1.27	1.3	1.19	1.07	0.92	0.63	0.76	49.34	52.46	57.21	59.89	63.0	61.25	
			7.0	6.65	6.26	6.0	5.76	5.88	1.86	1.54	1.27	1.07	0.89	1.04	1.01	0.87	0.68	0.47	0.23	0.36	60.0	64.67	67.89	71.03	76.24	74.32	
			7.17	7.01	6.76	6.47	6.33	6.41	2.55	2.36	2.17	2.02	1.77	1.91	1.5	1.36	1.19	1.03	0.82	0.95	36.0	39.57	43.0	45.23	52.02	49.0	

The general pattern of adsorption is shown in figure 8. Figure 8 represents the common trend of typical adsorption of SLS, CTAB and TX-100 on COP. It is clear from the graph that initially all the three types of surfactants get adsorb rapidly at the solid-liquid interface. Maximum adsorption is taking place at C_e 100 $mg.g^{-1}$, after that equilibrium is attained. The reason is, in the beginning number of adsorption sites was greater, thus the extent of adsorption was greater, but with the passage of time, the adsorption sites get exhausted and thus lead to slower adsorption and after sometime, saturation reached.

Table 3: Measurement of pH, conductivity, OD and surface tension between adsorption of SLS, CTAB & TX-100 and various shaking time

S. #	Surfactant	Charcoal Type	Shaking Time (min.) for pH Measurement				Shaking Time (min.) for Conductivity Measurement				Shaking Time (min.) for OD Measurement				Shaking Time (min.) for Surface Tension Measurement			
			15	30	45	60	15	30	45	60	15	30	45	60	15	30	45	60
1	SLS CTAB TX-100	Fresh COP	4.5	4.84	5.33	5.12	2.8	2.6	2.15	2.38	1.4	1.28	0.97	1.16	55.27	63.24	69.25	65.54
			8.91	8.68	8.13	8.36	2.4	2.27	1.85	2.16	1.76	1.53	1.17	1.44	66.57	71.41	78.78	73.61
			7.06	6.72	6.02	6.41	2.78	2.56	2.39	2.44	1.57	1.31	1.15	1.25	42.50	46.32	53.61	50.15
2	SLS CTAB TX-100	Alkali Activated Recycled COP	6.77	7.02	8.19	7.46	1.94	1.67	1.02	1.38	1.01	0.83	0.42	0.66	61.17	67.33	78.75	63.23
			7.59	7.05	6.24	6.67	2.3	2.12	1.76	2.0	1.37	1.19	1.0	1.09	59.53	62.67	67.0	64.83
			6.46	6.28	6.0	6.11	2.59	2.37	2.13	2.24	1.48	1.34	1.11	1.25	45.00	48.88	57.01	53.00
3	SLS CTAB TX-100	Acid Activated Recycled COP	6.37	6.88	7.43	6.97	2.02	1.8	1.27	1.59	1.21	1.06	0.73	0.96	57.21	59.89	63.0	61.25
			6.75	6.26	5.76	5.92	2.14	2.01	1.59	1.91	1.12	1.03	0.78	0.96	69.89	72.34	79.24	74.11
			6.43	6.33	6.06	6.27	2.48	2.27	2.06	2.19	1.39	1.20	1.02	1.13	44.1	49.33	55.01	50.00

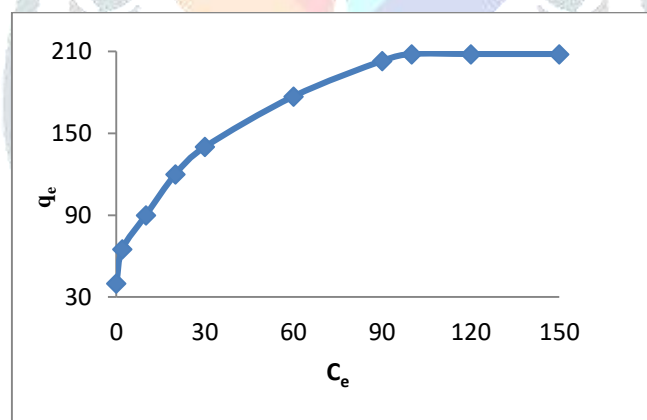


Fig.8: Common Trend of Adsorption of Surfactants (SLS, CTAB, TX-100)

IV. CONCLUSIONS

Results reveal that maximum adsorption takes place by using 2.0 gm adsorbent bed dose, 45 minute shaking time at $8 \times 10^{-4} M$ initial concentration and after that equilibrium is attained. Alkali activated recycled COP is found to be a better adsorbent bed for the adsorption of SLS because the sulphate ions (acid radicals) of SLS, get adsorb at alkali surface readily, whereas acid activated recycled COP is better enough for adsorbing CTAB because the ammonium ions (basic radicals) of CTAB, get adsorb at acid surface easily. TX-100 is adsorbed through bed by physical adsorption. Weak van der waals force of attraction is responsible for the adsorption of TX-100. Spontaneous, feasible and exothermic adsorption is shown by thermodynamic study. The adsorption kinetics shows pseudo second order reaction. Adsorption process represents an effective method for all the three kinds of surfactants. It's a faster, convenient and less energy-consuming procedure for the effective exclusion of surfactants present in effluent intended for reuse.

Apart from utilizing cheap and abundant agricultural waste product, it is promising indeed to convert orange peel into activated charcoal. This conversion will address problems associated with unwanted agricultural wastes been converted into useful, value-added alternative adsorbent. After use, the adsorbent bed can be reused as domestic fuel, without any harm. This can also be used as additives with conventional bed with no side effects. It may be a better replacement of synthetic adsorbent beds.

V. ACKNOWLEDGMENT

We gratefully appreciate the support of management of Rungta College of Engineering & Technology, Bilhalai and Chhattisgarh Council of Science & Technology, Raipur for providing lab facilities and essential prop up.

VI. REFERENCES

- [1] Y. CL, X. ZZ, F. MX, L. HY, X. YH and Z. T, "Study on Characteristics and Harm of Surfactants," *Journal of Chemical and Pharmaceutical Research*, Volume 06, Issue 07, pp. 2233-2237, 2014.
- [2] R. P. F, S. AD, C. B, D. P, M. L, A. L and B. JL, "Occurrence and Fate of Selected Surfactants in Sea Water at the Outfall of the Marseille Urban Sewerage System," *Internationaal Journal of Environmental Science and Technology*, Volume 12, pp. 1527-1538, 2015.
- [3] Arnelli, A. WP, F. Z and A. Y, "Adsorption Kinetics of Surfactants on Activated Carbon," in *Materials Science & Engineering 349 (2018) 012001*, 2018.
- [4] R. S, A. AK, M. S and J. MS, "Surfactants: Toxicity, Remediation and Green Surfactants," *Environmental Chemistry Letters*, Volume 12, Issue 2, pp. 275-287, 2014.
- [5] A. Manisha, K. N. Jyoti and P. Sangeeta, "Performance of Carbonized Agricultural Waste As A Low-Cost Adsorbent for the Removal of Sodium Dodecyl Sulfate from Aquatic Environment," *International Journal of Scientific and Engineering Research (IJSER)*, Volume 04, Issue 06, pp. 2909-2913, 2013.
- [6] V. M. Oksana and A. D. Tetiana, "Removal of Anionic Surfactants from Wastewater by Magnetic Mineral Sorbents," *Journal of Water Security*, Volume 02, pp. 1-9, 2016.
- [7] B. MMM and F. J. MR, "Adsorptive Removal of Surfactant from Aqueous Solutions onto Activated Carbon using UV Spectroscopy," *eba* 10, pp. 1-7, 2014.
- [8] K. I, "Nanofiltration-Ion Exchange System for Effective Surfactant Removal from Water Solutions," *Brazilian Journal of Chemical Engineering*, Volume 34, Issue 04, pp. 887-894, 2014.
- [9] K. Y, A. C, B. H and K. B, "Nanofiltration of Single and Mixture Solutions Containing Anionic and Non-Ionic Surfactants Below Their Critical Micellar Concentrations," *Journal of Membrane Science*, Volume 282, Issue 1-2, pp. 401-412, 2006.
- [10] A. Ayla, T. Eylem, B. Deniz and V. Sevil, "Removal of Anionic Surfactant Sodium Dodecyl Sulfate from Aqueous Solutions by O₃/UV/H₂O₂ Advanced Oxidation Process: Process Optimization with Response Surface Methodology Approach," *Sustainable Environment Research*, Volume 28, pp. 65-71, 2018.
- [11] R. Francisco, O.-K. Magdalena, G. Marta and L. Stainslaw, "Removal Efficiency of Anionic Surfactants from Water During UVC Photolysis & Advanced Oxidation Process in H₂O₂/UVC System," *Archives of Environmental Protection*, Volume 43, Issue 01, pp. 20-26, 2017.
- [12] T. EL, Z. Guoquan, C. Jie, S. NA and Y. Fenglin, "Combined Chemical Coagulation-Flocculation/ Ultraviolet Photolysis Treatment for Anionic Surfactants in Laundry Wastewater," *Journal of Environmental Chemical Engineering*, Volume 02, pp. 2111-2119, 2014.
- [13] A. R. Ismaeel, K. M. Edbey and A. M. Shagulf, "Study of Adsorption Mechanism, Mode, Isotherms, and kinetics, of Dodecyl Sulfate from Raw drinking water on Activated Charcoal using pH Measurements," *International Journal of ChemTech Research*, pp. 1314-1319, 2010.
- [14] A. M. Tahir, A. A. Ali and S. Muhammad, "Adsorptive Removal of Reactive Black-5 from Wastewater Using bentonite Clay: Isotherms, Kinetics and Thermodynamics," *Sustainability*, Volume-7, pp. 15302-15318, 2015.
- [15] M. Hossain, Z. Hasan and T. Islam, "An Equilibrium Study On Adsorption of Reactive Black 5 on Used black Tea Leaves," *Bangladesh Journal of Agriculture and Environment*, Volume 7, Issue 1, pp. 30-35, 2013.
- [16] M. Hossain and M. Hassan, "Kinetic and Thermodynamic Study of the Adsorption of Crystal Violet on Used Black Tea Leaves," *Orbital: Elec. Journal of Chemistry*, Volume 5, Issue 3, pp. 148-156, 2013.
- [17] M. A. Hossain and M. Mohibullah, "Kinetics and Thermodynamics of Adsorption of Basic Blue-41 on Used black Tea leaves," *International Journal of Scientific and Engineering Research*, Volume 8, Issue 4, pp. 995-1002, April 2017.
- [18] J. Piccin, G. Dotto and L. Pinto, "Adsorption Isotherms and Thermochemical Data of FD & C RED N° 40 Binding by Chitosan," *Brazilian Journal of Chemical Engineering*, Volume 28, No. 02, pp. 295-304, 2011.
- [19] I. A. R and E. K. M, "Thermodynamics & Kinetics Study of Physical Removal of High Concentration Sodium Dodecyl Sulfate During Recycling of Industrial and Household Wastewater by Adsorption at activated Charcoal Using pH Measurements," *Journal of Chemical and Pharmaceutical Research*, Volume 2, Issue 6, pp. 459-466, 2010.
- [20] EPA Guidelines : Water & Wastewater Sampling, 2007.
- [21] S. Pandharipade, M. Y. and T. R., "Synthesis of adsorbents from waste materials such as Ziziphus jujube seed and mango kernel," *International Journal of Engineering Research and Application*, Vol. 02, pp. 1337-1341, 2012.
- [22] M. Sulyman, J. Namiesnik and A. Gierak, "Low Cost Adsorbents Derived from Agricultural By-Products/ Wastes for Enhancing Contaminant Uptakes from Wastewater: A Review," *Polish Journal of Environmental Studies*, Volume 26, No. 02, pp. 479-510, 2017.
- [23] M. A. Hossain and R. Ahmed, "Kinetics and Thermodynamics of Adsorption for the Removal of Fast Green by Used Black Tea Leaves from Aquatic Environment," *British Journal of Environmental Sciences*, Volume 03, No. 05, pp. 32-44, December 2015.
- [24] S. M. E. Said, "ADSORPTIVE REMOVAL OF SOME DETERGENTS FROM WASTE WATER USING FRIENDLY ENVIRONMENTAL MATERIALS," *Ass. Univ. Bull. Environ. Res. Vol. 7 No. 2*, pp. 137-147, October 2004.
- [25] B. Thomas and W. Andreas, "A new Method to Determine the Anaerobic Degradability of Surfactants: The AnBUSDiC Test," *Environmental Science Europe*, pp. 24-38, 2012.
- [26] J. L. Berna, G. Cassani, C. Hager, N. Rehman, I. Lope, D. Schowanek, J. Steber, K. Taeger and T. Wind, "Anaerobic Biodegradation of Surfactants – Scientific Review," *Carl Hanser Verlag Tenside Surfactants Detergents*, vol. 2007, no. 06, pp. 312-347, 2007.

- [27] M. A. Aboulhassan, S. Souabi, A. Yaacoubi and M. Baudu, "Removal of surfactant from industrial wastewaters by coagulation flocculation process," *International Journal of Environmental Science & Technology*(1735-1472), vol. 3, no. 4, pp. 327-332, 2006.
- [28] I. Kowalska, "Surfactant removal from water solutions by means of ultrafiltration and ion-exchange," *Elsevier Desalination*, vol. 221, no. 3, p. 351-357, Mar 2008.
- [29] D. Smith and H. Zhou, "Advanced technologies in water and wastewater treatment," *Journal of Environmental Engineering & Science*, vol. 1, p. 247-264, 2002.
- [30] S. R. Taffarel and J. Rubio, "Adsorption of sodium dodecyl benzene sulfonate from aqueous solution using a modified natural zeolite with CTAB," *Elsevier Minerals Engineering*, vol. 23, no. 10, pp. 771-779, 2010.
- [31] E. Olkowaska, Z. Polkowska and J. Namiesnik, "Analytical Procedures for the Determination of Syrfactants in Environmental Samples," *Sciencedirect.com, TALANTA*, pp. 1-13, 2012.
- [32] M. Agrawal, J. K. Nagwanshi and S. Patil, "Performance of Carbonized Agricultural Waste as a Low-Cost Adsorbent for the Removal of Sodium Do-decyl Sulfate from Aquatic Environment," *International Journal of Scientific and Engineering Research, ISSN 2229-5518*, vol. 4, no. 6, pp. 2909-2913, 2013.
- [33] A. M. Ali and S. S. Reza, "Adsorption of a nonionic surfactant onto a silica surface," *Energy Sources, Part A: Recovery, Utilization and Environmental Effects*, pp. 1455-1460, 2016.
- [34] R. N. a. S. S. K. Soni. A., "Removal of SDS from Waste Water of (Bilaspur- Region) by Using Natural Bioadsorbent," *International Journal of Advanced Engineering Research and Studies*, vol. 02, no. 01, pp. 76-79, 2012.
- [35] M. Mishra, P. Muthuprasanna, K. Prabha, P. Rani, A. Babu, I. Chandiran, G. Arunachalam and S. Shalini, "Basics and Potential Applications of Surfactants- A Review," *International Journal of Pharma Tech Research*, pp. 1354-1365, 2009.
- [36] S. Qureshi, A. Soomro, H. Bux and A. Yasmeen, "Genotoxic and Carcinogenic Effects of House Hold Detergents Using Chromosomal Aberration Assay in Chickpea (*Cicer arietinum* L.) Root Tip Cells," *World Applied Sciences Journal*, vol. 32, no. 7, pp. 1381-1387, 2014.
- [37] D. A.O., O. A.P., O. A.M. and D. O., "Langmuir, Freundlich, Temkin and Dubinin-Radushkevich Isotherms Studies of Equilibrium Sorption of Zn²⁺ Unto Phosphoric Acid Modified Rice Husk," *IOSR Journal of Applied Chemistry, ISSN 2278-5736*, vol. 03, no. 01, pp. 38-45, 2012.
- [38] R. F., R. J. and K. S., *Adsorption by Powders & Porous Solids-Principles, Methodology and Applications*, London, UK: Academic Press, 2013.
- [39] E.-S. SM, "Adsorptive Removal of Some Detergents from Waste Water using Friendly Environmental Materials," *Ass. Univ. Bull. Environment Res.*, vol. 7, no. 2, pp. 137-147, 2004.
- [40] S. pandharipade, Y. Moharkar and T. R., "Synthesis of Adsorbents from Waste Materials Such as Ziziphus jujube and mango kernel," *International Journal of Engineering Reseadarch and Application*, vol. 2, no. 4, pp. 1337-1341, 2012.
- [41] A. Ismeel, K. Edbey and A. Shagulf, "Study of Adsorption Mechanism, Mode, Isotherms and Kinetics of Do-decyl Sulfate from Raw Drinking Water on Activated Charcoal Using pH Measurements," *International Journal of Chem Tech Research*, vol. 2, pp. 1314-1319, 2010.
- [42] A. Ali, S. Uzair, N. Malik and M. Ali, "Study of Interaction Between Cationic Surfactants and Cresol Red by Electrical Conductivity and Spectroscopy Methods," *Journal of Molecular Liquids, ELSEVIER*, pp. 395-403, 2014.
- [43] M. a. Edy, *Waste Water Engineering- Treatment and Reuse*, New York: McGraw-Hill Ryerson, 2003.
- [44] D. AO, O. AP, O. AM and D. O. "Langmuir, Freundlich, Temkin and Dubinin-Radushkevich Isotherms Studies of Equilibrium Sorption of Zn²⁺ Unto Phosphoric Acid Modified Rice Husk," *IOSR Journal of Applied Chemistry, IOSR-JAC*, pp. 38-45, 2012.
- [45] F. Rouquerol, J. Rouquerol and K. S., *Adsorption by Powders and Porous Solids- Principles, Methodlogy and Applications*, London: UK: Academic Press, 28 Oval Road, London, 2013.
- [46] Metcalf and Eddy, *Waste Water Engineering-Treatment and Reuse*, ISBN-10: 0071122508, McGraw-Hill's Higher Education, 2003.
- [47] M. J. Rosen, *Surfactants and Interfacial Phenomena*, 3 ed., vol. 2, New Jersey: John Wiley & Sons, 2004, pp. 1314-1319.
- [48] El-Said and M. Saad, "Adsorptive removal of some detergents from wastewater using friendly environmental material," *Ass. Univ. Bull. Environ. Res.*, vol. 7, no. 2, pp. 137-147, 2004.
- [49] I. Adel R. and E. Khaled M., "Thermodynamics and Kinetics Study of Physical Removal of High Concentration Sodium Dodecyl Sulfate during Recycling of Industrial and Household Wastewater by Adsorption at Activated Charcoal using pH Measurements," *Journal of Chem. Pharm. Research*, pp. 459-466, 2010.
- [50] Svehla and G., *Vogel's Qualitative Inorganic Analysis*, London, UK: Penguin Books Limited, 2002.
- [51] B. Thomas and W. Andreas, "A new method to determine the anaerobic degradability of surfactants: the AnBUSDiC test," *Environmental Science Europe*, pp. 24-38, 2012.
- [52] C. G. C. R. N. L. I. S. D. S. J. T. K. a. W. Berna. J. L., "Anaerobic Biodegradation of Surfactants – Scientific Review," vol. 06, pp. 312-347, 2007.
- [53] B. M. I.-T. a. M. J. D.-D. Rivera Jose-Utrilla, "Removal of Surfactant Dodecylbenzene Sulfonate by Consecutive Use of Ozonation and Biodegradation," *Engineering Life Sciences*, vol. 12, pp. 113-116, 2012.
- [54] A. A. and Y. T., "Improvement of Coagulation-Flocculation Process for Treatment of Detergent Wastewaters Using Coagulant Aids," *International Journal of Chemical and Environmental Engineering*, vol. 01, no. 02, pp. 97-101, 2010.
- [55] R. K., G. O., B. U., W. S. and Z. M., "Cause and Effect Relationship between Foam Formation and Treated Wastewater Effluents in a Transboundary River," *Physics and Chemistry of the Earth (ELSEVIER)*, vol. 34, p. 565-573, 2009.
- [56] D. Smith and H. Zhou, "Advanced technologies in water and waste water treatment," *Journal of Environmental Engineering & Science*, vol. 01, pp. 247-264, 2002.

- [57] I. Adel R. and E. Khaled M., "Thermodynamics and Kinetics Study of Physical Removal of High Concentration Sodium Dodecyl Sulfate during Recycling of Industrial and Household Wastewater by Adsorption at Activated Charcoal using pH Measurements," *Journal of Chem. Pharm. Res.*, vol. 02, pp. 459-466, 2010.
- [58] A. A. Manisha, N. J. Kapil and P. Sangeeta, "Performance of Carbonized Agricultural Waste as a Low-Cost Adsorbent for the Removal of Sodium Dodecyl Sulfate from Aquatic Environment," *International Journal of Scientific & Engineering Research*, ISSN 2229-5518, vol. 4, no. 6, pp. 2909-2913, 2013.
- [59] S. R. Taffarel and J. Rubio, "Adsorption of sodium dodecyl benzene sulfonate from aqueous solution using a modified natural zeolite with CTAB," *Minerals Engineering (ELSEVIER)*, vol. 23, pp. 771-779, 2010.
- [60] Y. Jiao, "The effect of SDS and SDBS on activated sludge oxygen uptake rate and nitrification," RMIT University, 2009.
- [61] G. V.K. and Suhas, "Application of low-cost adsorbents for dye removal--a review," PubMed, 2009.
- [62] E. U.J., U. S.A. and E. U.M., "Coconut coir dust as a low cost adsorbent for the," *Journal of Saudi Chemical Society*, pp. 67-76, 2016.
- [63] K. S. M and G. RM, "Removal of Methylene Blue from Effluent by Using Activated Carbon and Water Hyacinth as Adsorbent," *International Journal of Chemical Engineering and Applications*, Vol. 2, No. 5, pp. 317-319, October 2011.
- [64] E. UJ, U. SA and E. UM, "Coconut coir dust as a low cost adsorbent for the removal of cationic dye from aqueous solution," *Journal of Saudi Chemical Society*, pp. 67-76, 2012.
- [65] ParmarM and T. LS, "Heavy metal Cu, Ni and Zn: Toxicity, health hazards and their removal techniques by low cost adsorbents: A short overview," *International Journal of Plant, Animal and Environmental Sciences*, pp. 143-157, 2013.
- [66] N. J. Ben, H. Noureddine and E. Foued, "Characterization of Activated Carbon Prepared from Sludge Paper for Methylene Blue Adsorption," *Journal of Materials and Environmental Sciences (JMES)*, Volume 8, Issue 6, pp. 1960-1967, 2017.
- [67] B. MMM and F. J. MR, "Adsorptive Removal of Surfactant from Aqueous Solutions onto Activated Carbon Using UV Spectroscopy," *eba* 10, 2014.
- [68] C. A. Dutt and T. KL, "Effect of Household Detergents (Surfactants) Degraded Through Aquatic Fungi," *Recent Research in Science & Technology*, Volume 5, Issue 5, pp. 12-16, 2013.
- [69] Q. S. Tabasum, S. A. Ghafar, B. Haidi and Y. Abida, "Genotoxic and Carcinogenic Effects of Household Detergents Using Chromosomal Aberration Assay in Chickpea (Cicer arietinum L.) Root Tip Cells," *World Applied Sciences Journal*, Volume 32, Issue 7, pp. 1381-1387, 2014.
- [70] M. Manisha, M. P, P. K. Surya, R. P. Sobhita, B. A. Satish, C. I. Sarath, A. G and S. S, "Basics and Potential Applications of Surfactants: A Review," *International Journal of Pharm Tech Research*, pp. 1354-1365, 2009.
- [71] Y. CL, X. ZZ, F. MX, L. HY, X. YH and Z. T, "Study on Characteristics and Harm of Surfactants," *Journal of Chemical and Pharmaceutical Research*, Vol.6, Issue 7, pp. 2233-2237, 2014.
- [72] R. Sharrel, A. A. K, M. Sathish and J. MS, "Surfactants: Chemistry, Toxicity and Remediation," Switzerland, Springer International Publishing Switzerland 2013, January 2013, pp. 277-324.
- [73] Arnelli, A. WP, F. z and A. Y, "Adsorption Kinetics of Surfactants on Activated Carbon," in *IOP Conference Series: Materials Science & Engineering* 349 (012001), Diponegoro, 2018.
- [74] A. R. Afidah and G. Z. N, "Efficient Adsorption of 4-Chloroglucinol from Aqueous Solution Using Optimal Activated Carbon: Equilibrium Isotherms and Kinetic Modelling," *Journal of the Association of Arab Universities for Basic and Applied Sciences*, Volume 21, pp. 17-23, 2016.
- [75] P. Deepak, S. Shikha and S. Pardeep, "Removal of Methylene Blue by Adsorption onto Activated Carbon Developed from Ficus Carica Bast," *Arabian Journal of Chemistry*, Volume 10, pp. S1445-S1451, 2017.